
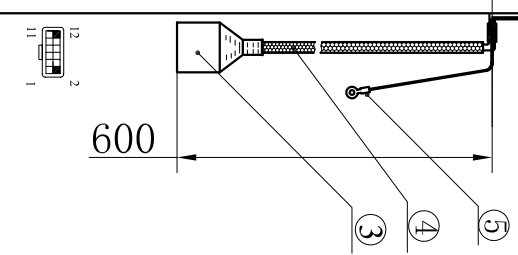


NOTE:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
THE UNSPECIFIED DIMENSION TOLERANCES ARE PLUS/MINUS 0.5.
ACTIVE AREA DIMENSIONS: 380(L) × 304(W)
VIEWABLE AREA DIMENSIONS: 380(L) × 304(W)
PROFILE DIMENSIONS: 430.5(L) × 354.5(W) × 6.2(D).
2. SPECIFICATION:

- ① TECHNIC'S HOLE: 6-φ 2.5.
- ② DUST-PROOF FRAME, MATERIAL: ALUMINUM.
- ③ 8X19 HOUSING MATES WITH CONTROLLER HOUSING MATERIAL: PTUL94V-0(BLACK)
HOUSING OUTER LAYER MATERIAL: PVCBG01RUBBER.
- ④ CABLE, OUTER LAYER MATERIAL: PVCBG01.
- ⑤ GROUND LINE.
- ⑥ GLASS BOARD, THICKNESS: 4.

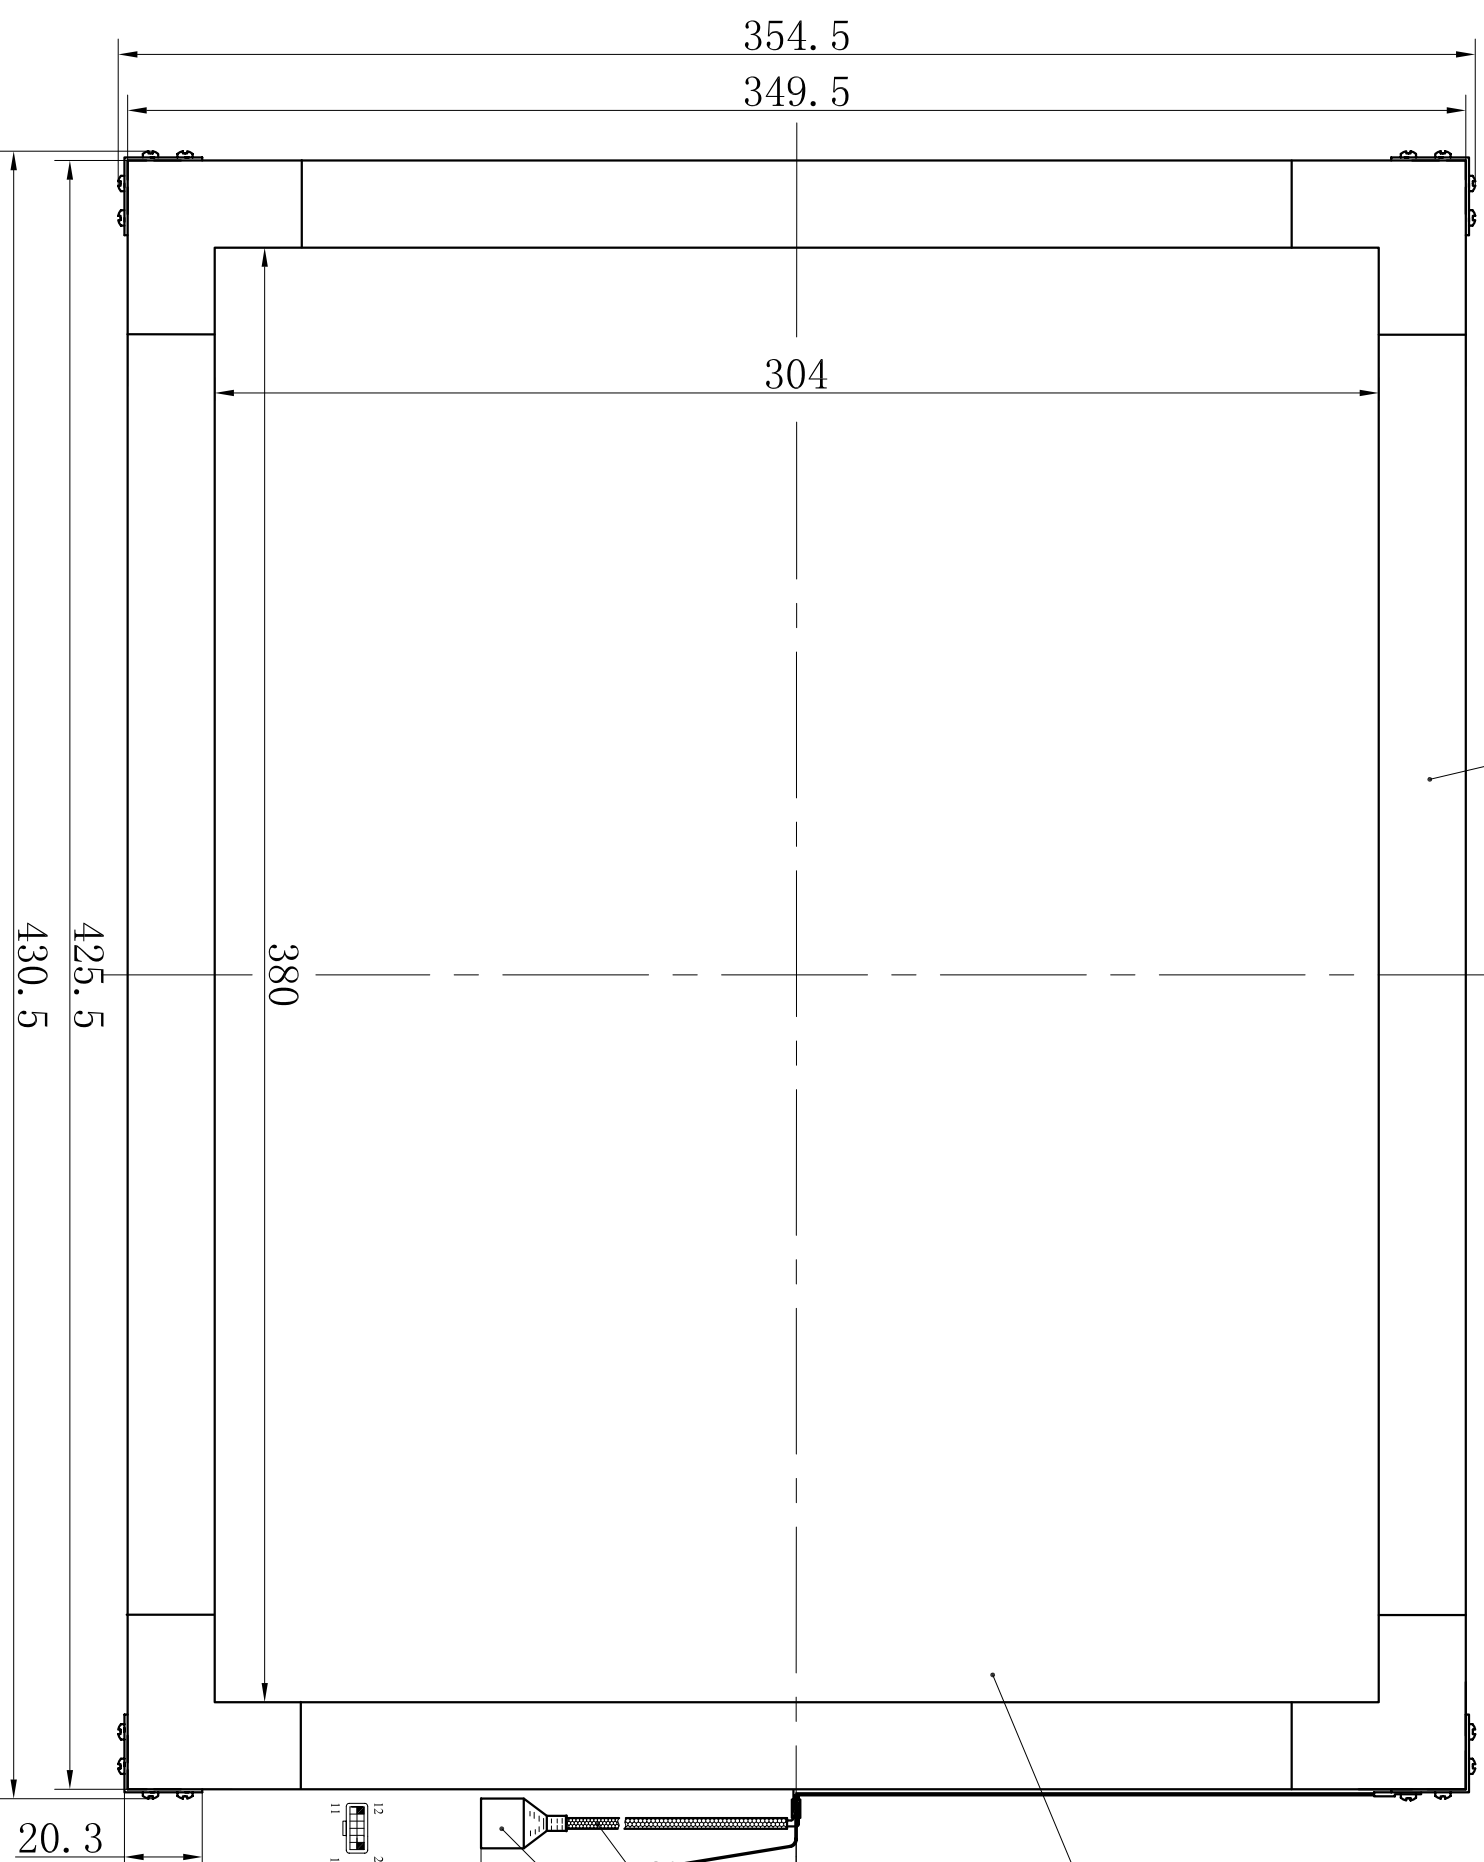

CONNECTION CHART		INSULATION COLOR
PIN 1	SIGNAL GND	OVERALL SHIELD
PIN 2	KEY	
PIN 3	Y-in2	BLUE
PIN 4	Yout	BLUE
PIN 5	Y-in1	BLACK
PIN 6	GND	YELLOW
PIN 7	GND	
PIN 8	GND	GREEN
PIN 9	X-in2	WHITE
PIN 10	Xout	RED
PIN 11	X-in1	RED
PIN 12	KEY	